

1500 gpm with 8 x 20 Fabricated Steel Head

SUBMITTAL

VERTICAL TURBINE ELECTRIC
FIRE PUMP



1500 G.P.M. _____ T.D.H.

FM UL NFPA-20 ONLY
 APPROVAL CONSTRUCTION

MODEL 8x12H VTF
8 x 20 "F" DISCHARGE HEAD
1770 R.P.M. WATER LUBE

MOTOR _____ HP _____
VOLT _____ PH _____ HZ _____
 CONTROLLER MODEL _____


JOB NAME: _____
ITEM NO. _____

CUSTOMER _____

ORDER NO. _____
MFG. REP. _____

DWG. NO. _____
SERIAL NO. _____

By: _____ Date: _____
NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED

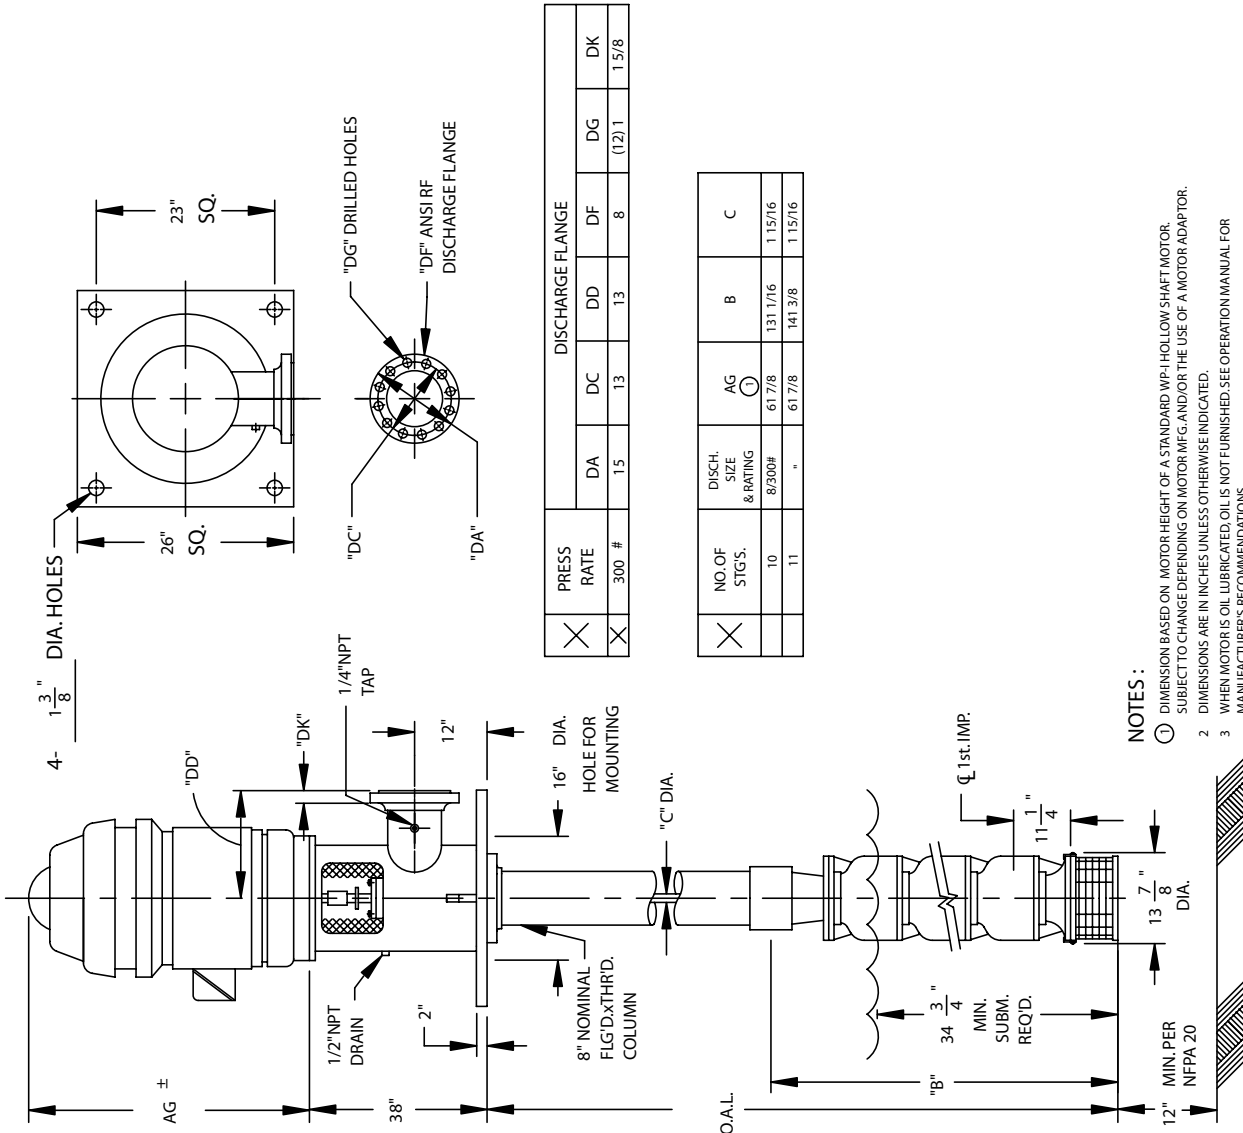

NOTES:

- 1 DIMENSION BASED ON MOTOR HEIGHT OF A STANDARD WP-HOLLOW SHAFT MOTOR. SUBJECT TO CHANGE DEPENDING ON MOTOR MFG. AND/OR THE USE OF A MOTOR ADAPTOR.
- 2 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE INDICATED.
- 3 WHEN MOTOR IS OIL LUBRICATED OIL IS NOT FURNISHED. SEE OPERATION MANUAL FOR MANUFACTURER'S RECOMMENDATIONS.

FP-EF-05 (REV#3)